





Sliding, Automatic Closing Fire Door Assembly

Maximum Recommended Size – 3600mm x 3000mm
(for larger openings refer to 5HR sliders)



Bi-parting pair of 3600mm high sliding doors after 145 minutes of testing at BRANZ Laboratory.

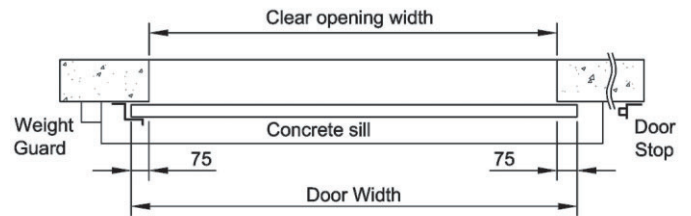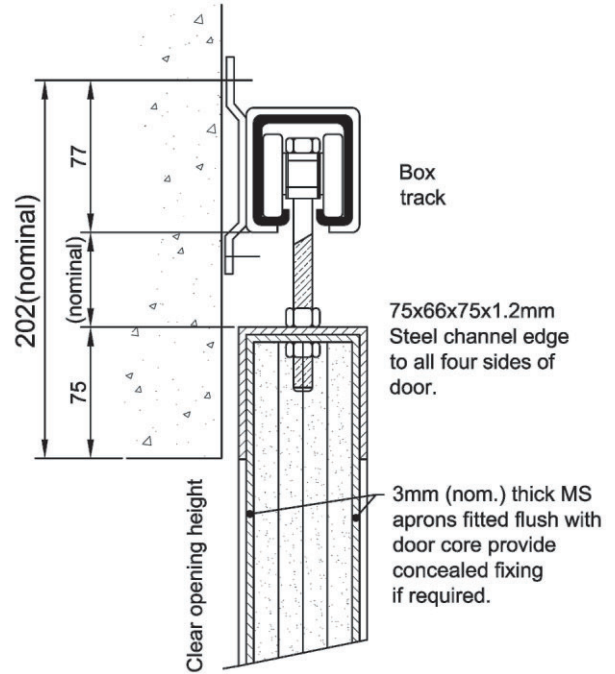

PLAN - WITH DOOR IN CLOSED POSITON



UDM sliding fire doors are available with vision panels of Pyroceram glass.

- Usage: Protection of openings in 2HR walls or on both faces of a 4HR wall.
- Facings: Standard 1.0mm zincanneal sheet steel. Alternative of 4mm decorative fire retardant chemical treated plywood, also available with fire retardant grade laminate facings BUT with a maximum 1? HOUR rating.
- Track: Standard with Henderson 301/305 or "Centor" AA4 systems.
- Note: Door leaf must overlap opening by 75mm at top and both stiles. Bottom clearance should not exceed 10mm.
- Weight: Plywood Faced 45kg/m², Steel clad 50kg/m².